


Specifications


WMA (Manual Piezo Ignition)
WEA (Electronic Ignition)
WFA (Flexi Ray)

Mounting Brackets supplied with all heaters.




WMA / WEA / WFA 16

Input 16 MJ, 4.44 KW
Width 401mm
Height 334m (WFA Model 2030mm)
Depth 180mm (WFA Model 450mm)
Weight 5.6kg




WMA / WEA / WFA 24

Input 24 MJ, 7.0 KW
Width 499mm
Height 334m (WFA Model 2030mm)
Depth 180mm (WFA Model 450mm)
Weight 6.5kg

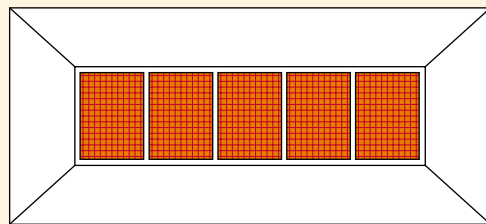

WMA / WEA / WFA 40

Input 40 MJ, 11.11 KW
Width 695mm
Height 334m (WFA Model 2030mm)
Depth 180mm (WFA Model 450mm)
Weight 8.4kg

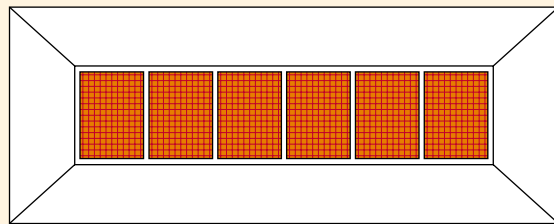


WMA / WEA / WFA 48

Input 48 MJ, 14KW
Width 793mm
Height 334m (WFA Model 2030mm)
Depth 180mm (WFA Model 450mm)
Weight 12.3kg

Gas Pressure (KPA)	Min	Max	Gas Connection (all models)	
Natural Gas	0.98	4	Natural Gas	½" copper flare
LPG	2.75	4	LPG	3/8" copper flare

Size	Approx. Area Heated		Approx. Positioning for Total heating		Approx. Height from floor Metres	Ceiling Clearance Metres
	M2		A	B		
	Spot	Total	Facing Each Other	Side by side		
16	19	25.0	8.0	6.1	2.5	0.9
24	28	37.0	9.8	7.3	2.7 - 3.4	1.0
40	47	62.0	15.0	9.0	3.4 - 4.5	1.0
48	56	74.0	17.0	10.0	3.9 - 4.9	1.0

(If insufficient ceiling clearance available use Optional heat shield)



NOTE: Minimum Mounting height above floor level is 2.5 metres.

These appliances should be installed and used in accordance with—AG601

Manufacturer's Installation Instructions, Local Gas Fitting Regulations, Municipal Building Codes,

A.G.A. Installation Code for gas Burning Equipment, and must be installed by an authorised person.

A.G.A. Approval 5492G

Distributed By:

AIRA

AIRA Pty Ltd,
ABN 38 005 058 364
ACN 005 058 364

www.aira.com.au

VICTORIA

144 Colchester Road, Bayswater North VIC 3153 Australia
Ph: (03) 9839 8000 - Fax: (03) 9761 4732
Email: aira@aira.com.au